Using audio devices and FM

Connecting via audio cable

3.5 mm stereo jack

Connecting via an FM system

- To pause/restart transmission of audio inputs from any source press the Main Button
- To stop audio, turn off audio source or unplug audio cable
- To stop FM, switch off FM or unplug the FM receiver from iCom

If the signal transmission through audio cable or FM system is not stable, short press the ON/OFF Button during transmission to "lock" the audio program.

iCom Quick Guide and features

Light indicator (for details refer to the user guide)

Red, one flash
= iCom switching off

Green
= iCom switch on

Yellow, interrupted solid
= Audio transmission locked in

Yellow, solid
= Audio transmission

Yellow, medium flash
= Audio transmission pause

Blue, medium flash
= 1 phone connected or Bluetooth audio paused



Blue, short flash
= 2 phones connected



Blue, solid
= Bluetooth transmission (music or call)

To check the version of your iCom press the ON/OFF Button once in standby mode.

Yellow, 3 flashes
= iCom version 3
offers 2 phone support, voice dialing, last number redial and audio lock.

Please ask your hearing care professional for further help.

For your safety, please read the iCom user guide carefully. Pay particular attention to the "Important information" section and the following symbol ⚠ which refers to associated warnings.

www.phonak.com

0682

029-0695-02/V3.00/2010-03/A+W Printed in Switzerland © Phonak AG All rights reserved

iCom Quick Guide and Features

Main Button

ON/OFF Button
press 2 seconds

Voice dial
press 2 seconds

Last number redial
press 2x short

Pick up or end call, accept FM signal
short press

Refuse incoming call
press 2 seconds

PHONAK life is on

Features in iCom

Voice dial
Please refer to the phone user manual for instructions. Press the Main Button for 2 seconds. After you hear a beep, say the name of the contact you want to call.*

Last number redial
To redial the last number dialled, press the Main Button twice. The last number dialled is activated and the call is made.*

* The phone must support these features and the features must be enabled by your hearing care professional.
iCom must be switched on but no call and no music or FM listening is in progress.

Audio lock
You are using the audio cable (jack) or an FM receiver. But during a speaker pause or very soft music the audio signal somtimes drops out.
Then press the ON/OFF button shortly to "lock" the audio signal.

Getting started

Charging the iCom battery

You can continue to use iCom while it is charging.

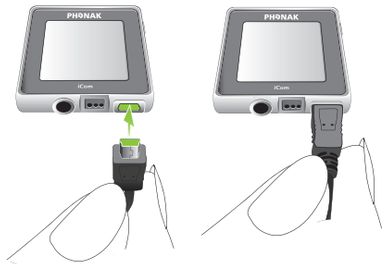

Turning your iCom on and off

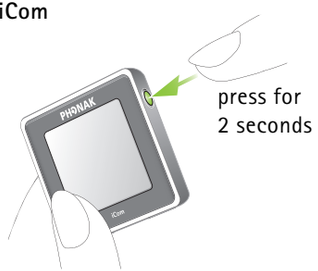

Setting up Bluetooth devices

Before you start using your iCom with Bluetooth devices you need to pair the devices. Please refer to the main user guide for instructions. Pairing code is "0000".

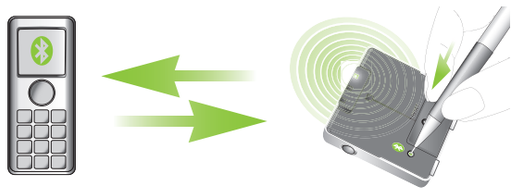

Using iCom with one or two mobile phones

- You can connect up to two phones at the same time with iCom
- Each phone has its own fixed ringtone
- To accept an incoming phone call, press the Main Button shortly. You will hear the caller's voice in your hearing instruments. Remember
  your voice is picked up by iCom.
- During a call the second phone cannot be picked up
- If two phones are connected at the same time, Voice dial applies to the last paired

Using iCom with a cordless (DECT) or older phones

Using cordless phones (DECT) or older phones with "Headset" profile only

Note: For these phones the Bluetooth indicator (blue light) might not blink even if the phone was paired before.

Step 1: On the phone, type the number you want to dial or select it from the phone book

Step 2: Briefly press the Main Button (or press it for 2 seconds if you are already in a streaming iCom program)

Step 3: Wait for 5 seconds

Step 4: The dialing process will start and your hearing system switches to the phone program automatically